



Photovoltaics is our passion

ET MODULE

ET-P654210	210Wp	ET-P654185	185Wp
ET-P654200	200Wp	ET-P654180	180Wp
ET-P654190	190Wp		

EFFICIENCY

- Low voltage-temperature coefficient allows higher power output at high-temperature condition
- High efficient, high reliable solar cells ensure our product output stability

MATERIALS

- Advanced EVA encapsulation system with triple-layer back sheet meets the most stringent safety requirements for high-voltage operation
- The sturdy, anodized aluminum frame allow the modules to be mounted on a variety of standard racking systems and to withstand harshest conditions
- Ultra reliable bypass diodes prevent damage through overheating due to shaded or defective cells
- Innovative, enviromentally-friendly packing method using pile-edges ensures modules arrive in perfect condition
- New frame design incorporating hexagonal shaped drainage holes, with more grounding holes provide flexible installation and use

BENEFITS

- Manufactured in an ISO 9001:2000 certified plant
- High efficiency, high safety, high reliability
- Output power tolerance of +/-3%
- 25-year limited warranty on power output, 5-year limited warranty on materials and workmanship



ET SOLAR GROUP www.etsolar.com

ET Solar China

24F, A2 World Trade Center Mansion,
67 Shanxi RD, Nanjing 210009, China
Tel: +86 25 8689 8096 Fax: +86 25 8689 8097
Email: sales@etsolar.com

ET Solar USA

4900 Hopyard Road, Suite 290,
Pleasanton, CA 94588, USA
Tel: +1 925 460 9898 Fax: +1 925 460 9929
Email: sales@etsolar.us

ET Solar Europe

Stefan-George-Ring 29, D-81929 Munich, Germany
Tel: +49 89 309040 263 Fax: +49 89 309040 466
Email: sales@etsolar.de
(Italy Office) Tel: +39 392 2340606 Email:sales@etsolar.it

ET Module


ET-P654210 ET-P654200 ET-P654190 ET-P654185 ET-P654180

SPECIFICATIONS

Model type	ET-P654210	ET-P654200	ET-P654190	ET-P654185	ET-P654180
Peak power (Pmax)	210W	200W	190W	185W	180W
Cell type	PolyCrystalline Silicon, 156mm x 156mm				
Number of cells	54 cells in series				
Weight	17.8 kg (39.3 lbs)				
Dimensions	1482×992×50 mm (58.3×39.1×2 inch)				
Maximum power voltage (Vmp)	27.54V	27.21V	26.78V	26.45V	26.45V
Maximum power current (Imp)	7.63A	7.36A	7.10A	6.99A	6.81A
Open circuit voltage (Voc)	32.83V	32.72V	32.50V	32.35V	32.35V
Short circuit current (Isc)	8.50A	7.86A	7.72A	7.70A	7.60A
Maximum system voltage	DC 1000V				
Temp. Coeff. of Isc (TK Isc)	0.09 %/°C				
Temp. Coeff. of Voc (TK Voc)	-0.34 %/°C				
Temp. Coeff. of Pmax (TK Pmax)	-0.37 %/°C				
Normal Operating Cell Temperature	44.4±2 °C				

Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25 °C.

PHYSICAL CHARACTERISTICS Unit:mm (inch)

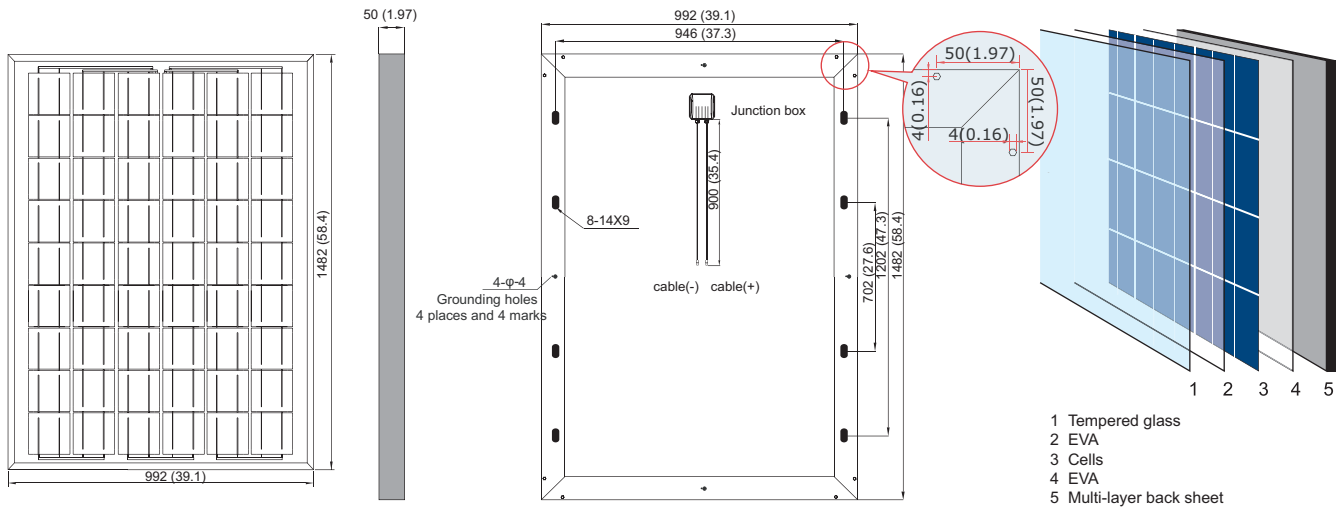

ELECTRICAL CHARACTERISTICS

