



*Photovoltaics is our passion*

## ET MODULE

ET-P672280	280Wp	ET-P672250	250Wp
ET-P672270	270Wp	ET-P672240	240Wp
ET-P672260	260Wp		

### EFFICIENCY

- Low voltage-temperature coefficient allows higher power output at high-temperature condition
- High efficient, high reliable solar cells ensure our product output stability

### MATERIALS

- Advanced EVA encapsulation system with triple-layer back sheet meets the most stringent safety requirements for high-voltage operation
- The sturdy, anodized aluminum frame allow the modules to be mounted on a variety of standard racking systems and to withstand harshest conditions
- Ultra reliable bypass diodes prevent damage through overheating due to shaded or defective cells
- Innovative, enviromentally-friendly packing method using pile-edges ensures modules arrive in perfect condition
- New frame design incorporating hexagonal shaped drainage holes, with more grounding holes provide flexible installation and use

### BENEFITS

- Manufactured in an ISO 9001:2000 certified plant
- High efficiency, high safety, high reliability
- Output power tolerance of +/-3%
- 25-year limited warranty on power output, 5-year limited warranty on materials and workmanship



**ET SOLAR GROUP** [www.etsolar.com](http://www.etsolar.com)

#### ET Solar China

24F, A2 World Trade Center Mansion,  
67 Shanxi RD, Nanjing 210009, China  
Tel: +86 25 8689 8096 Fax: +86 25 8689 8097  
Email: sales@etsolar.com

#### ET Solar USA

4900 Hopyard Road, Suite 290,  
Pleasanton, CA 94588, USA  
Tel: +1 925 460 9898 Fax: +1 925 460 9929  
Email: sales@etsolar.us

#### ET Solar Europe

Stefan-George-Ring 29, D-81929 Munich, Germany  
Tel: +49 89 309040 263 Fax: +49 89 309040 466  
Email: sales@etsolar.de  
(Italy Office) Tel: +39 392 2340606 Email:sales@etsolar.it

# ET Module


ET-P672280 ET-P672270 ET-P672260 ET-P672250 ET-P672240

## SPECIFICATIONS

Model type	ET-P672280	ET-P672270	ET-P672260	ET-P672250	ET-P672240
Peak power (Pmax)	280W	270W	260W	250W	240W
Cell type	PolyCrystalline Silicon, 156mm x 156mm				
Number of cells	72 cells in series				
Weight	23.0 kg (50.7 lbs)				
Dimensions	1956×992×50 mm (77×39.1×2 inch)				
Maximum power voltage (Vmp)	36.72V	36.40V	36.00V	35.20V	34.95V
Maximum power current (Imp)	7.63A	7.42A	7.23A	7.12A	6.88A
Open circuit voltage (Voc)	43.78V	43.63V	43.49V	43.20V	43.20V
Short circuit current (Isc)	8.30A	8.10A	7.99A	7.70A	7.60A
Maximum system voltage	DC 1000V				
Temp. Coeff. of Isc (TK Isc)	0.09 %/°C				
Temp. Coeff. of Voc (TK Voc)	-0.34 %/°C				
Temp. Coeff. of Pmax (TK Pmax)	-0.37 %/°C				
Normal Operating Cell Temperature	44.4±2 °C				

Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m<sup>2</sup> solar irradiance, 1.5 Air Mass, and cell temperature of 25 °C.

## PHYSICAL CHARACTERISTICS Unit:mm (inch)

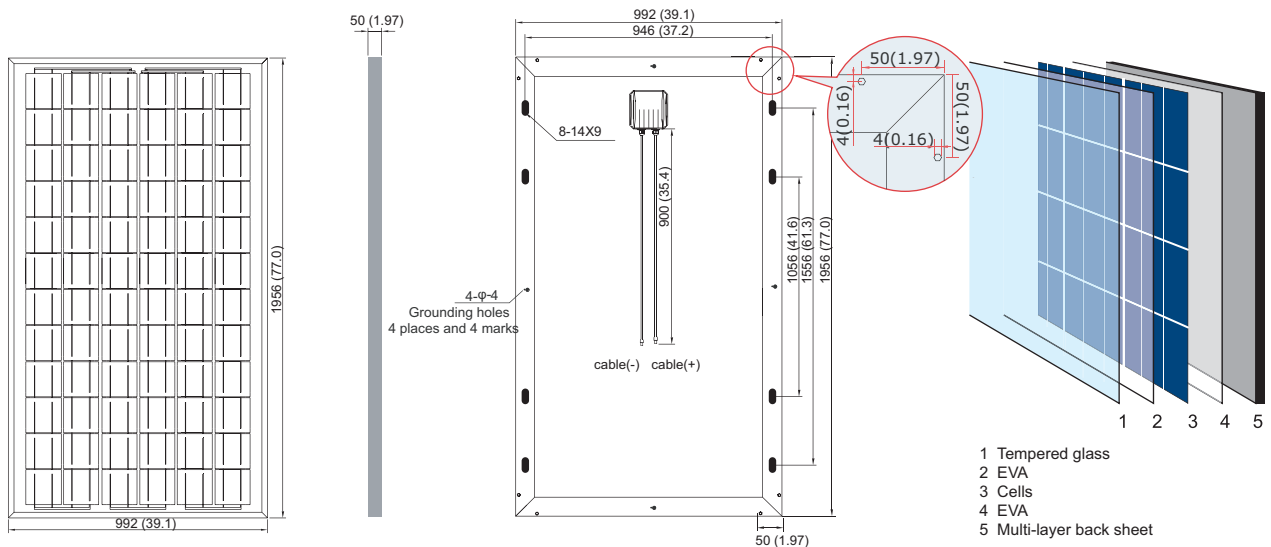

## ELECTRICAL CHARACTERISTICS

